

Metalbestos Chimney Systems (USA Only - See separate instructions for Canada)

DRIPLESS SMOKE PIPE ADAPTOR

(Part No. 6T-DSA, 7T-DSA, 8T-DSA)

The Dripless Smoke Pipe Adaptor is used to connect standard singlewall stove pipe to Metalbestos Chimney System (MCS) Insulated Pipe. Because DSA is designed to slip inside single wall stove pipe, any creosote dripping down the chimney is contained on the inside of the pipe system.

To install the Dripless Smoke Pipe Adaptor to Metalbestos Chimney:

1. Insert the flared end of the DSA into the opening of a (FC) Finish Collar, (FSP) Finish Support or (CSP) Ceiling Support as shown in Fig. #1.
2. The flared end of the DSA should fit over the outside of the inner liner of the Metalbestos Pipe. It is held in that position with four (4) #8 x 3/8" sheet metal screws.
3. To attach the DSA to single wall smoke pipe, slide the single wall smoke pipe over the outside of the DSA. The DSA acts as an adjustable length for the single wall pipe. Secure the single wall to the DSA with three (3) sheet metal screws once the correct length is determined.

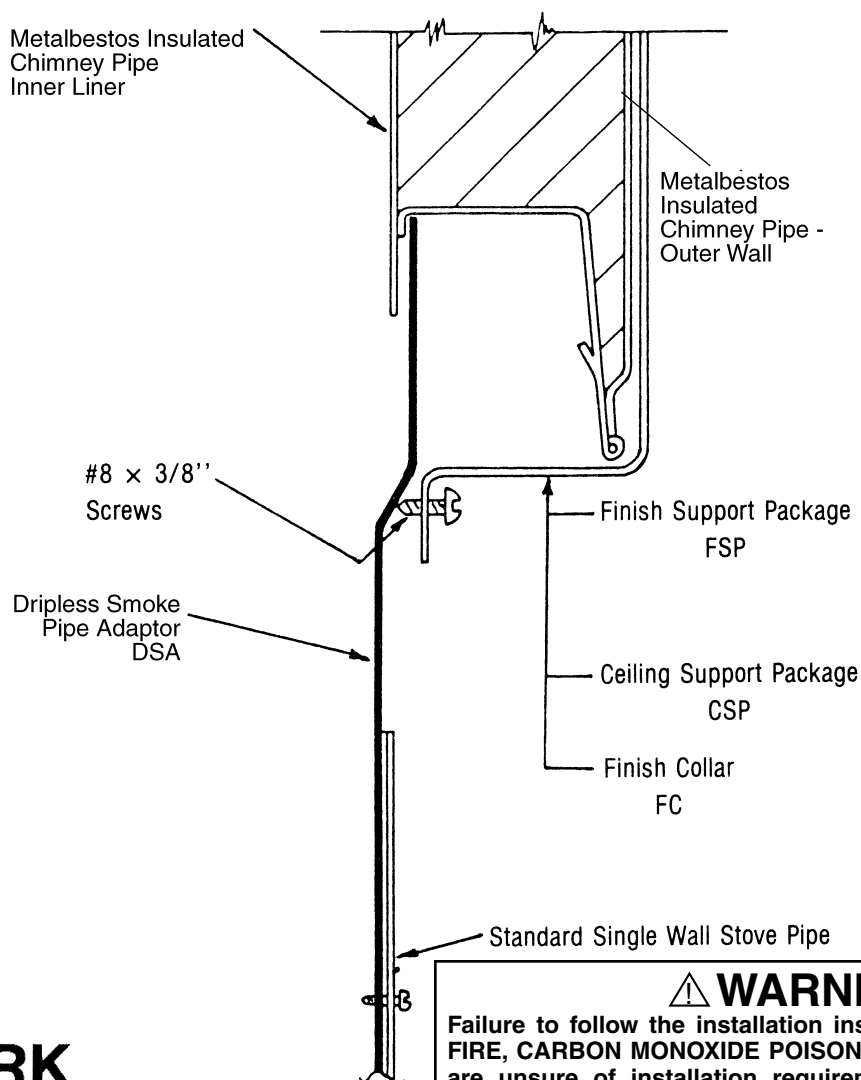


FIG. #1



WARNING
Failure to follow the installation instructions could cause FIRE, CARBON MONOXIDE POISONING, OR DEATH. If you are unsure of installation requirements, call the Phone Number listed on the instructions or sizing handbook.